

# GMG

Global Machinery Group, Inc.

# 1530-ED Micro Electric Drive

## MICRO SLAB SCISSOR LIFT

- ✓ **Maximum Performance**
- ✓ **Superior Components**
- ✓ **Environmentally Better**

### STANDARD FEATURES:

- Direct Electric Drive - providing whisper quiet operation and extended duty cycles
- Extremely light weight 1,895 lbs (860 kg) with low ground pressure. Perfect for elevator and mezzanine applications
- Easily fits through standard doorways
- Drives at full height
- Fully proportional drive and lift
- Amazing 30% gradeability
- Active pothole protection system
- Automatic 'Smart' battery charger for quick recharging
- Multiple disc brakes for smooth stopping
- Extra long slide-out deck with 4 oversized rollers for silky smooth operation
- Folding guardrails
- AC power cable to platform
- Pull out module for easy servicing
- Nitrate coated pins provide long lasting maintenance free service
- 2 year warranty

**EXTREME GRADE  
FOR HEAVY CONSTRUCTION USE**

[www.goGMG.com](http://www.goGMG.com)



Effective Date: January, 2018. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using GMG equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied.

# SPECIFICATIONS

## MODEL 1530-ED Micro

Measurements	US	Metric
Working height maximum	20.7'	6.5 m
<b>A</b> Platform height maximum	14.7'	4.5 m
<b>B</b> Platform height - stowed	36.6"	.93 m
<b>C</b> Platform length - retracted	50.4"	1.28 m
<b>D</b> - extended	70.9"	1.8 m
Slide-out platform extension deck	20.5"	.52 m
<b>E</b> Platform width - outside	29.9"	.76 m
Toeboard height	6.7"	0.17 m
<b>F</b> Height - stowed	79.9"	2.03 m
rails lowered	62.6"	1.59 m
<b>G</b> Length stowed	66.8"	1.69 m
w/o ladder	58.6"	1.49 m
<b>H</b> Width	29.9"	.76 m
<b>I</b> Wheelbase	41.3"	1.05 m
<b>J</b> Ground clearance - center	6"	15 cm
- pothole bars deployed	.8"	2 cm

### Productivity



Maximum platform occupancy	2	
Lifting capacity	530 lbs	240 kg
Extension deck capacity	220 lbs	100 kg
Drive height	Full Height	
Drive speed - stowed	2 mph	3.2 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed	30%	
Turning radius - inside	13.7"	.35 m
Raise speed	23 seconds	
Lower speed	19 seconds	
Controls	Fully Proportional	
Drive	Direct Electric	
Tires - Solid, Non-marking	9" x 3"	22.8x 7.6 cm

### Power

Power source	24v, 95Ah
--------------	-----------

### Weight

ANSI	1,895 lbs	860 kg
CE	1,895 lbs	860 kg

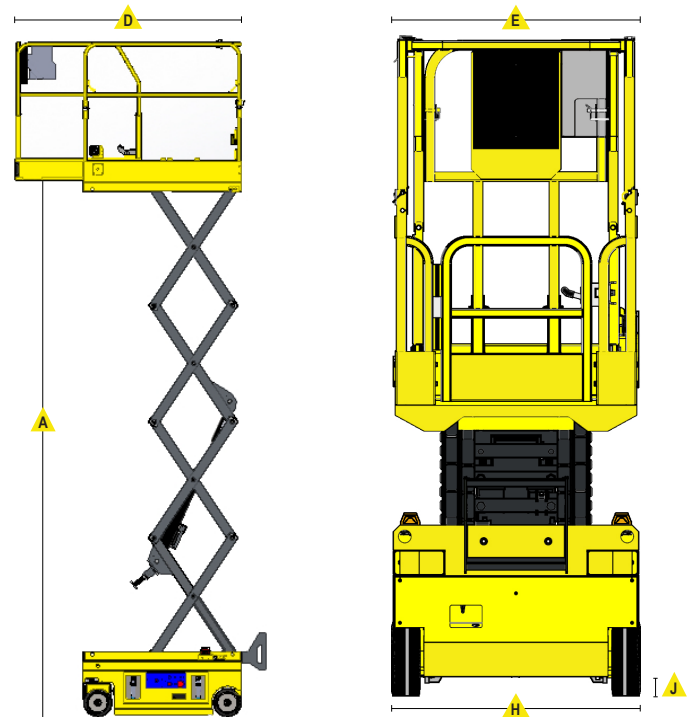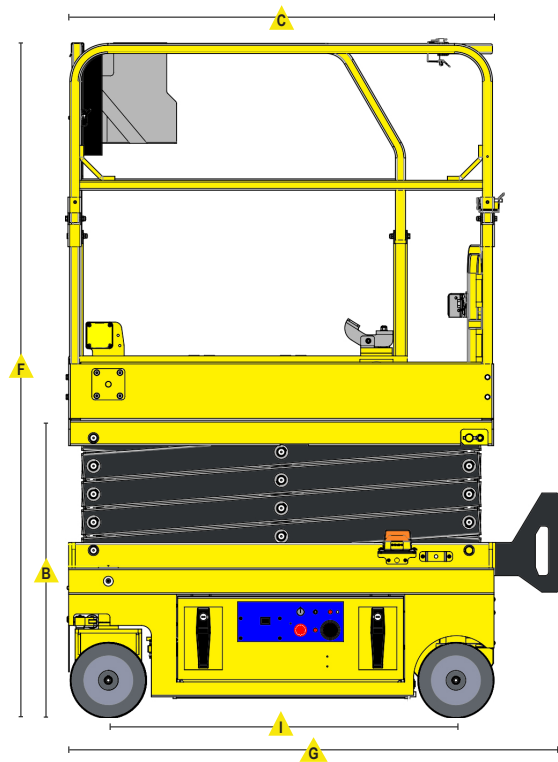

## GMG Corporate Office

3428 Bullock Lane  
 San Luis Obispo, CA 93401  
 Phone: +1.805.303.2066  
 Toll Free (USA/Canada): +1.800.301.0499

## Distributed By:



www.goGMG.com