



**NK** 1-phase  
50Hz

Compact - single phase - 2,2kW  
- for professional use

Generally applicable highgrade pump that can be used efficiently in draining in civil engineering through to deepwell applications. Maximum depth of submerison 50m.



[www.pumper.no](http://www.pumper.no)

## Top Discharge



Pumped water cools the motor and discharges as illustrated. The motor can be cooled even when pumping a small amount of water. The top discharge arrangement allows access into areas with space limitations.



## Efficient motor cooling

Slim line design with a top discharge offers economy of space. There is efficient motor cooling through a side flow channel.




## Increased water-pressure resistance

An newly developed mechanical seal endures water pressure of up to 5 kgf/cm<sup>2</sup> (0,49MPa/cm<sup>2</sup>). This makes the pumps usable at greater depth, such as in deep wells, to say nothing of use at general construction sites..

## Components:

001 Cable	052B Lower bearing
020 Pump casing	053 Motor protector
021 Impeller	054 Shaft
023 Strainer	055 Rotor
025 Mechanical seal	056 Stator
029 Oil casing	064 Motor casing
030 Oil lifter	068 Handle
031 Wear plate	071 Shaft sleeve
032. Outlet	076A Condensor
035 Oil plug	076B Condensor
036 Lubricant	077 Centrifugal switch
050 Motor cover	121 Packing
051 Head cover	122 V-ring
052A Upper bearing	127 Fixing plate

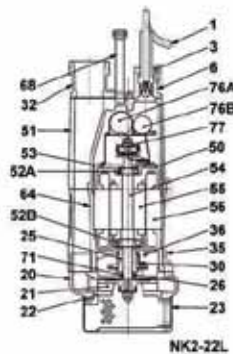

## Cast Iron used:

Ductile iron casting EN-GJS-700-2


Brinell hardness:

229 - 321

## Specifications:


Model	Colour code curve	Bore mm	Motor output kW	Rated current A	Head max. m	Capacity max. l/min	Dry weight kg w/o cable	Max. solid handling ø mm	Max. water depth m	Cable length m
NK2-22	1	50	2,2	13,5	24,0	525	29,0	6	50	20
NK2-22L	2	50	2,2	14,5	18,0	800	40,0	6	50	20

ø Discharge bore mm		50	
Pumping Fluid	Temperature	0-40°C	
	Type of Fluid	Spring water, Rain water, Ground water, Sand carrying water	
Pump	Components	Impeller	Semi-Vortex impeller
		Shaft Seal	Double mechanical seal
		Bearings	Shielded ball bearings
	Material	Impeller	Ductile iron casting EN-GJS-700-2, Chromium iron casting
	Casing	Ethylene propylene rubber, Grey iron casting EN-GJL-200	
	Shaft Seal	Silicon carbide in oil bath	
Motor	Type, Poles		Induction motor, 2 poles
	Lubrication		Turbine oil (ISO VG32)
	Motor Protector (built-in)		Circle thermal cut-out
	Insulation		Insulation class E
	Phase / Voltage		Single phase 230V / 110V / 50Hz
	Material	Casing	Aluminium die casting
Shaft		Stainless steel EN-X6Cr13, Stainless steel EN-X30Cr13	
Cable		Rubber, H07RN-F	
Discharge Connection		Threaded flange/Hose coupling	

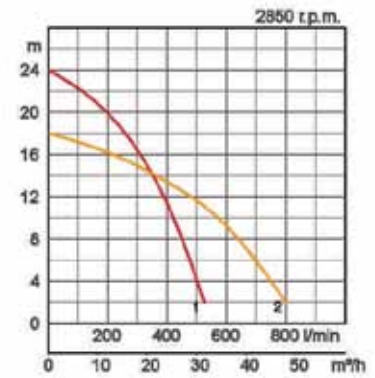

## Dimensions in mm:

Model	d	A	A1	B	B1	D	H	W1
NK2-22	50	240	187	555	473	240	623	120
NK2-22L	50	235	191	601	519	216	669	120

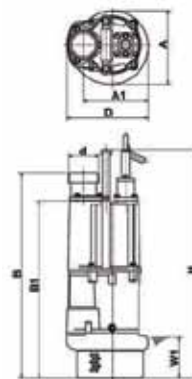

W1: continuous running water level

In the event of abrasive and corrosive utilization, stronger wear and tear will take place naturally in certain components. In this regard, please pay attention to our website [www.tsurumi-europe.com/english/applications.htm](http://www.tsurumi-europe.com/english/applications.htm).





Contributing to World-wide Prosperity and Understanding through Worker- and Environment-friendly Production.

Designed for increased productivity through fully integrated streamlined production systems, Tsurumi's factory in Kyoto (Japan) features a production capacity of a full 1 million pumps per year. Large-scale modern R&D facilities offer optimum conditions for experimenting and testing of even super-large pumps and for developing new products to expand the possibilities and applications of pumps. To provide optimum conditions for our main asset, our workers, as well as for the environment, special emphasis is placed on optimized working conditions with airconditioning, minimized dust and exhaust gas emission, comprehensive recycling and waste recovery.

## Tsurumi (Europe) GmbH

Heltorfer Straße 14  
D-40472 Düsseldorf  
Tel.: +49 (0)211-4179373  
Fax: +49 (0)211-4791429  
Email: [sales@tsurumi-europe.com](mailto:sales@tsurumi-europe.com)  
[www.tsurumi-europe.com](http://www.tsurumi-europe.com)

We reserve the right to change specifications and designs herein for improvement without prior notice. Our pumps are for professional use only. In the event that Tsurumi (Europe) GmbH have, in exceptional cases taken over, a manufacturer's warranty, this entitles the enduser to assert remedy free of charge against Tsurumi (Europe) GmbH due to any defect to the product occurring during the guarantee period (see below), also then when the warranty claims against the seller do not or no longer exist. In the event of malfunction, which is attributable to the improper handling by the enduser, no guarantee claim shall arise. Further claims shall not result from the warranty, unless if something to the contrary has explicitly been determined. The decision as to whether remedy is effected by way of replacement or repair shall be at the choice of Tsurumi (Europe) GmbH. The claims shall be time barred after a period of three months after expiry of the guarantee period, however, not before expiry of the warranty period which is valid towards the seller. In the event of doubt, the warranty period shall correspond with the warranty period which is valid between the end-user and his seller.



**Intec Pumper AS**  
Kongeveien 220, 1407 Vinterbro  
[post@intecpumper.no](mailto:post@intecpumper.no)  
Tlf.: 64 97 07 00

[www.pumper.no](http://www.pumper.no)



con-NK-EN